

Product Name	VHF Radiotelephone	Sensitivity	less than 6 dB V at SINAD 20 dB
GENERAL CHARACTERISTICS		Adjacent Channel Selectivity	70 dB
Rules and Regulations		DSC Section	
VHF parts	EN 301 925 V1.2.1(2006.12)	Distress Call and Message	Distress call attempt is transmitted as five consecutive calls. It is repeated after a random delay of between 3.5 and 4.5 min from the beginning of initial call until receiving the distress acknowledge call.
VHF ATIS	EN 300 698-1 V1.3.1(2003.12)		
DSC parts	EN 300 338 V1.2.1(1999.04)		
Class of Emission	G3E (telephone), G2B (DSC)		
Communication System		Message Log	
FM-8800S	Simplex/Semi-duplex	Receive:	50 distress messages + 50 non-distress messages
FM-8800D	Simplex/Full-duplex	Transmit:	50 messages
Channels		Storage	100 files
All VHF channels according to ITU-R Radio Regulations Appendix S18, All channels in FCC Part 80, Max 20 Private channels where permitted by Administrations (preset by the service agent), 10 weather channels (USA and Canada, receive only).		Interface	Nav data: IEC 61162-1 Printer: Centronics
Display		Alarm	Audible and visual on receipt of a DSC call (One dedicated output port also available)
22 characters x 10 lines, character 7 x 11 dots, backlit LCD		Receiver Characteristics	
TRANSMITTER		DSC frequency:	CH70
Frequency Range		Calling sensitivity:	Symbol error rate 10-2, input 0 dBμV
FM-8800S	Simplex/Semi-duplex: 155.000 - 161.475 MHz	Watch keeping:	Continuous watch on CH70
FM-8800D	Simplex/Full-duplex: 155.000 - 158.000 MHz	IF:	38.3625 MHz and 37.5 kHz
RF Output Power		POWER SUPPLY	
25 W, reducible to 1 W		FM-8800S: 24 VDC, 0.6 A (Standby), 1.6 A (RX), 4.7 A max. (TX)	
US version: CH13, 17, 67, 77 at 1 W, manual override for FULL		FM-8800D: 24 VDC, 0.6 A (Standby), 1.6 A (RX), 7.2 A max. (TX)	
Frequency Stability		ENVIRONMENT	
less than ±1.5 kHz		Temperature (IEC 60529): -15°C to +55°C	
Time-out Timer (For FCC)		Waterproofing (IEC 60945): IPX4(Transceiver Unit/Hand Set)	
Deactivates the transmitter after an uninterrupted transmission of more than 5 minutes		EQUIPMENT LIST	
ATIS (Automatic Transmitter Identification System)		Standard	
According to EN 300 698-1, an ATIS signal is transmitted every 5 min or at the end of transmission, by modulating the carrier at 1,300 and 2,100 Hz		1. Transceiver Unit FM-8800S/8800D	1 unit
RECEIVER		2. Handset HS-2003 or Microphone DM-2003 (Specify when ordering)	1 unit
Frequency Range		3. Handset cradle FP05-05510	1 unit
FM-8800S	Simplex: 155.000-159.600 MHz Semi-duplex: 161.475-164.200 MHz	4. Installation materials and spare parts	1 set
FM-8800D	Simplex: 155.000 - 158.000 MHz Full-duplex: 160.625 - 162.000 MHz	Option	
Receiving System	Double-conversion superheterodyne	1. Whip Antennas for VHF and DSC with Coaxial Antenna Cable	
AF Output Power	IF: 51.2375 MHz and 37.5 kHz 3 W (4 ohm loudspeaker) 2 mW (150 ohm handset)	2. Extension Handset for wing (Dynamic/Carbon) with Wing Receptacle OP05-57/OP05-58	
Audio Response	De-emphasis of 6 dB/ oct +1/-3 dB	3. Remote Station RB-8800/8810	
		4. Junction Box IF-8810	
		5. External Speaker SEM-21Q	
		6. Printer PP-510/PP-8800	
		7. Interface Box IF-8820 for IC-350	
		8. AC/DC Power Supply Unit PR-240-C	
		9. Flush Mount Kit OP05-1021	
		10. Console Kit RC-8800	





Full GMDSS-compliant, Simplex/Semi-duplex/Full-duplex, 25-Watt VHF Radiotelephone with a built-in Class-A DSC and CH70 Watch Receiver

- ▶ Fully meets ITU, IEC, ETSI, IMO for GMDSS and other national standards
- ▶ Compact all-in-one unit design includes a 25-Watt radiotelephone, Class A DSC modem and CH70 watch receiver
- ▶ Superb voice quality by employing the lower-noise-designed speaker
- ▶ Dual/multiple watch on selected channels while monitoring CH16
- ▶ Quick access to CH16 key
- ▶ Automatic entry of own ship position and time from a GPS navigator
- ▶ Easy channel readout with large characters
- ▶ ATIS mode available for European inland waterways
- ▶ Connects to an office or home via an existing PSTN (Public Switched Telephone Network)
- ▶ Simple interface with a printer and VDR (No need for a dedicated Junction Box)

The FURUNO FM-8800S/8800D are high quality, all-in-one marine VHF radiotelephones designed to comply with the GMDSS carriage requirements for safety and general communications. All the necessary functions such as a 25 W VHF radiotelephone, a Class A DSC modem and a CH 70 Watch Receiver are incorporated into the compact transceiver unit.

The FM-8800S offers simplex/semi-duplex, the FM-8800D offers simplex/full-duplex voice communications with superb voice quality. For easy readout of a selected channel, the silver-bright LCD on the front panel indicating the channel numbers with large, easy-to-read characters. The dedicated rotary control, numeric keys make selecting channels easy. Other standard features are instant access to CH 16, telephone call via a PSTN, Dual Watch and Multiple Watch functions, which allow watch on CH 16 and other selected channels.

Full Class A DSC functions are provided for distress alert transmission and reception, as well as the general DSC communications including Individual Telephone, All Ships, Group and Area Call. The FM-8800S/8800D maintain a continual watch on CH 70 even while you are using another VHF channel. Upon receiving an incoming DSC message, the FM-8800S/8800D give audible and visual alarms.


ATIS (Automatic Transmitter Identification System) is standard for use in European inland waterways. It automatically transmits the ID number when a communication is over or every 5 min while in communication. The ATIS mode and DSC mode are selectable through the menu.

Both units have two types of handsets: a compact hand MIC and a stylish handset. Up to four handsets can be additionally connected via an optional junction box. Each handset also functions as an intercom for onboard communication.

The compact transceiver unit allows a flexible and space-saving installation on a navigation console or the conning position. Flush mount installation is also available.




INTERCONNECTION DIAGRAM

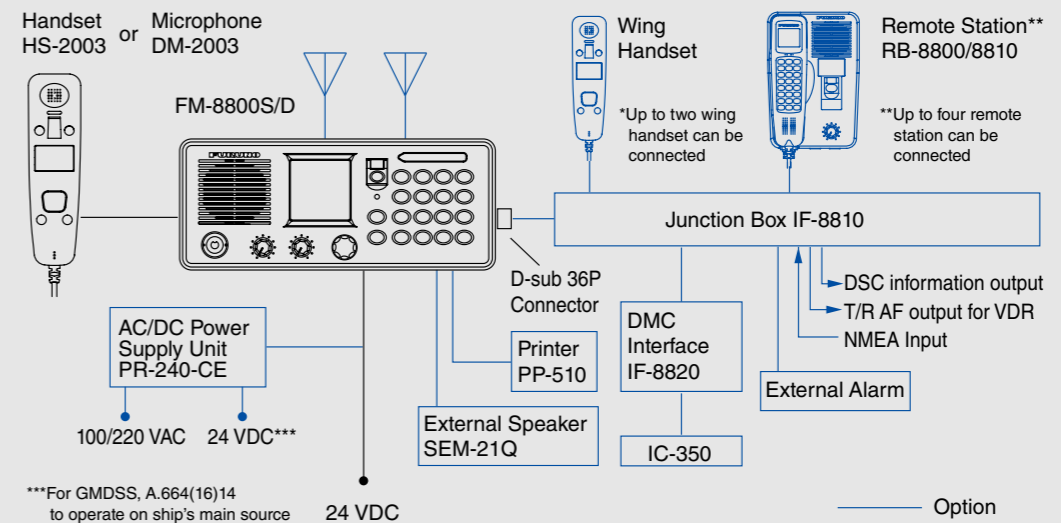

Transceiver Unit

FM-8800S: 5.5 kg, 12.1 lb
FM-8800D: 6.4 kg, 12.6 lb

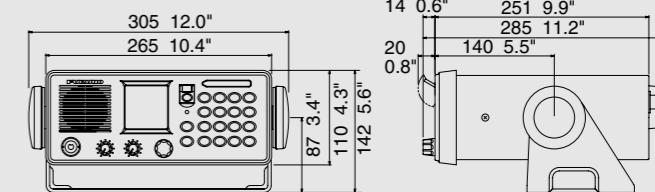

Remote Station RB-8800
1.2 kg, 2.7 lb

Remote Station RB-8810
0.7 kg, 1.5 lb

Handset HS-2003
0.2 kg, 0.4 lb

